


PERFORMANCE CHART AT N=2850RPM



NO.	Модель PPro-Light	Мощность		Q(m³/h)	H																	
		kW	HP		Q(l/min)	0	1.2	2.4	3.6	4.8	6.0	7.2	7.8	8.7								
A	PPro-L-V-S 9/2	0.55	0.75	0	0	20	40	60	80	100	120	130	145	25	24	22	20	16	12	7	4	0
B	PPro-L-V-S 9/3	0.75	1	0	0	20	40	60	80	100	120	130	145	37	36	34	31	27	22	15	12	6
C	PPro-L-V-S 9/4	1.1	1.5	0	0	20	40	60	80	100	120	130	145	52	50	47	44	38	31	22	17	9
D	PPro-L-V-S 9/5	1.5	2	0	0	20	40	60	80	100	120	130	145	64	63	61	56	49	40	29	23	12
E	PPro-L-V-S 9/6	1.85	2.5	0	0	20	40	60	80	100	120	130	145	76	75	73	68	60	49	35	27	14
F	PPro-L-V-S 9/7	2.2	3	0	0	20	40	60	80	100	120	130	145	89	87	84	78	69	56	41	32	18
G	PPro-L-V-S 9/8	2.5	3.3	0	0	20	40	60	80	100	120	130	145	104	102	99	93	82	68	50	40	22

Модель PPro-Light	Dn1	Dn2	Габаритные размеры (мм)								Масса кг
			h1	h2	h3	m	n	l1	L2	s	
PPro-L-V-S 9/2	1.25"	1"	390	173.5	36.5	182	180	122	122	9	13.0
PPro-L-V-S 9/3	1.25"	1"	415	198	36.5	182	180	122	122	9	14.0
PPro-L-V-S 9/4	1.25"	1"	465	224	36.5	200	208	135	135	12	21.7
PPro-L-V-S 9/5	1.25"	1"	490	248.5	36.5	200	208	135	135	12	23.0
PPro-L-V-S 9/6	1.25"	1"	555	275	36.5	206	218	135	135	12	29.8
PPro-L-V-S 9/7	1.25"	1"	580	299.5	36.5	206	218	135	135	12	31.0
PPro-L-V-S 9/8	1.25"	1"	605	324	36.5	206	218	135	135	12	32.6

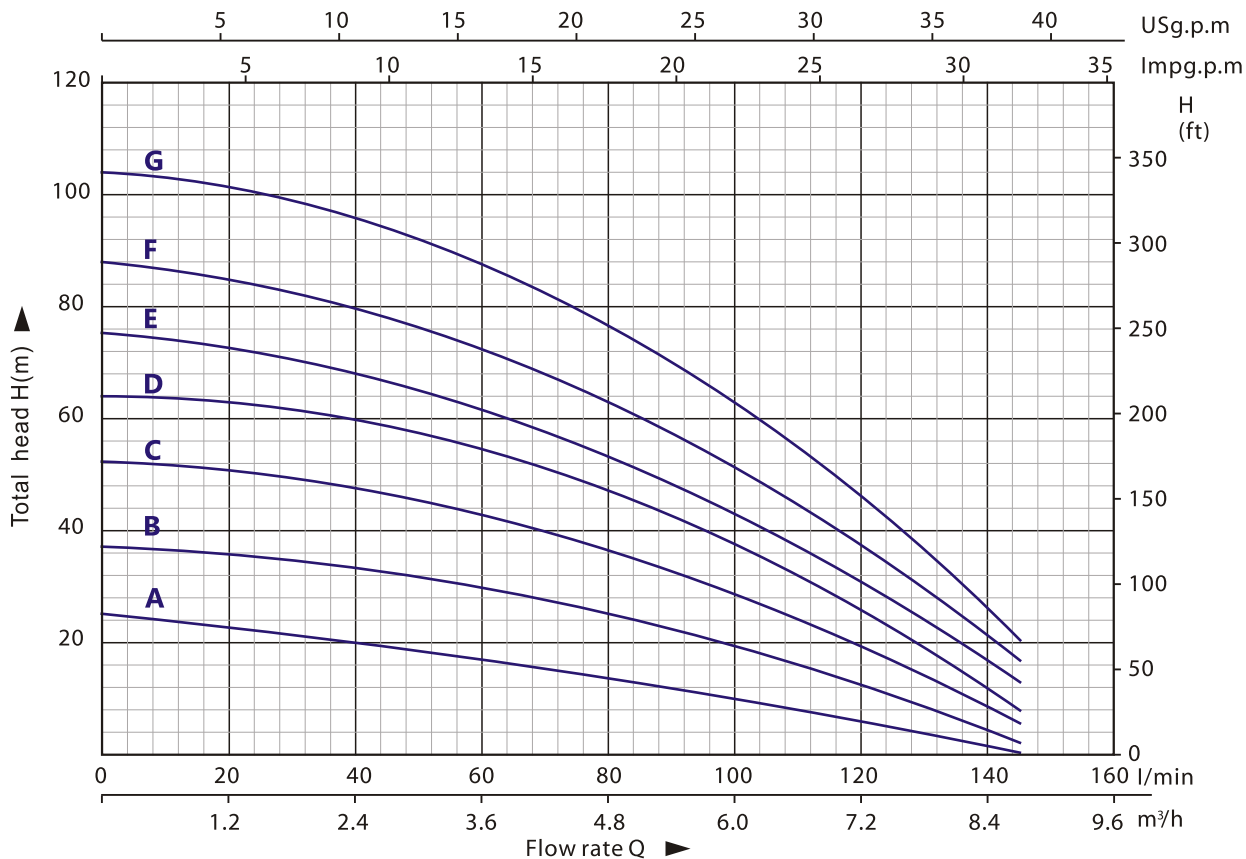